


25 kv

ELASTIMOLD

CONNECTOR 250 AWG  
ELASTIMOLD 03700-280

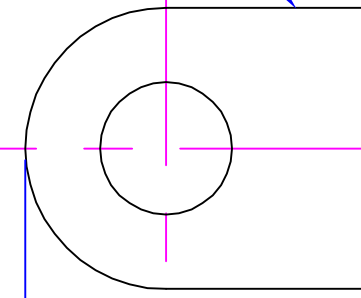

2.58" [2 9/16"]

9.74" [9 3/4"]

7-6 PRE-SWAGE (IA)  
INJECTION ADAPTER

6.21" [6 3/16"]

TOOL STOP

10.74" [10 3/4"]

4.45" [4 7/16"]

INSULATION  
260 MILS

INSULATION CUT  
BACK TEMPLATE

SEMI-CON SHIELD

ELASTIMOLD® T-BODY K655-K656BLR

MARKING TAPE

SEMI-CON SHIELD

CABLE INSULATION  
ADAPTER 655CA-J

TOOL STOP CUT  
BACK TEMPLATE

**NOTE: THE INSULATION ADAPTER MUST  
BE ON THE CABLE BEFORE SWAGING THE  
CONNECTOR. SEE NRI 31 & NRI 32**

The marking tape must be located from end of strip cable (as shown as pre-swage) to the end of cable insulation adapter and should be within 1/4 inch [6mm] after swage.

EMD-25 K655-656BLR-J 250 7-6 23mar10

© Copyright 2007, Novinium, Inc. All rights reserved.  
IA is protected by patents and patents pending



ELASTIMOLD is a registered trademark of Thomas & Betts Corp. novinium is a registered trademark of novinium.  
(Printing Instructions: For best results, print in color, protect w/5mil laminate and trim to size.)

SCALE: 1:1

8.5 x 22 paper size