


ELASTIMOLD® CONNECTOR 03700-XXX
SEE TABLE A FOR MODEL NUMBER
CUT TO LENGTH SHOWN.

ELASTIMOLD® 25KV

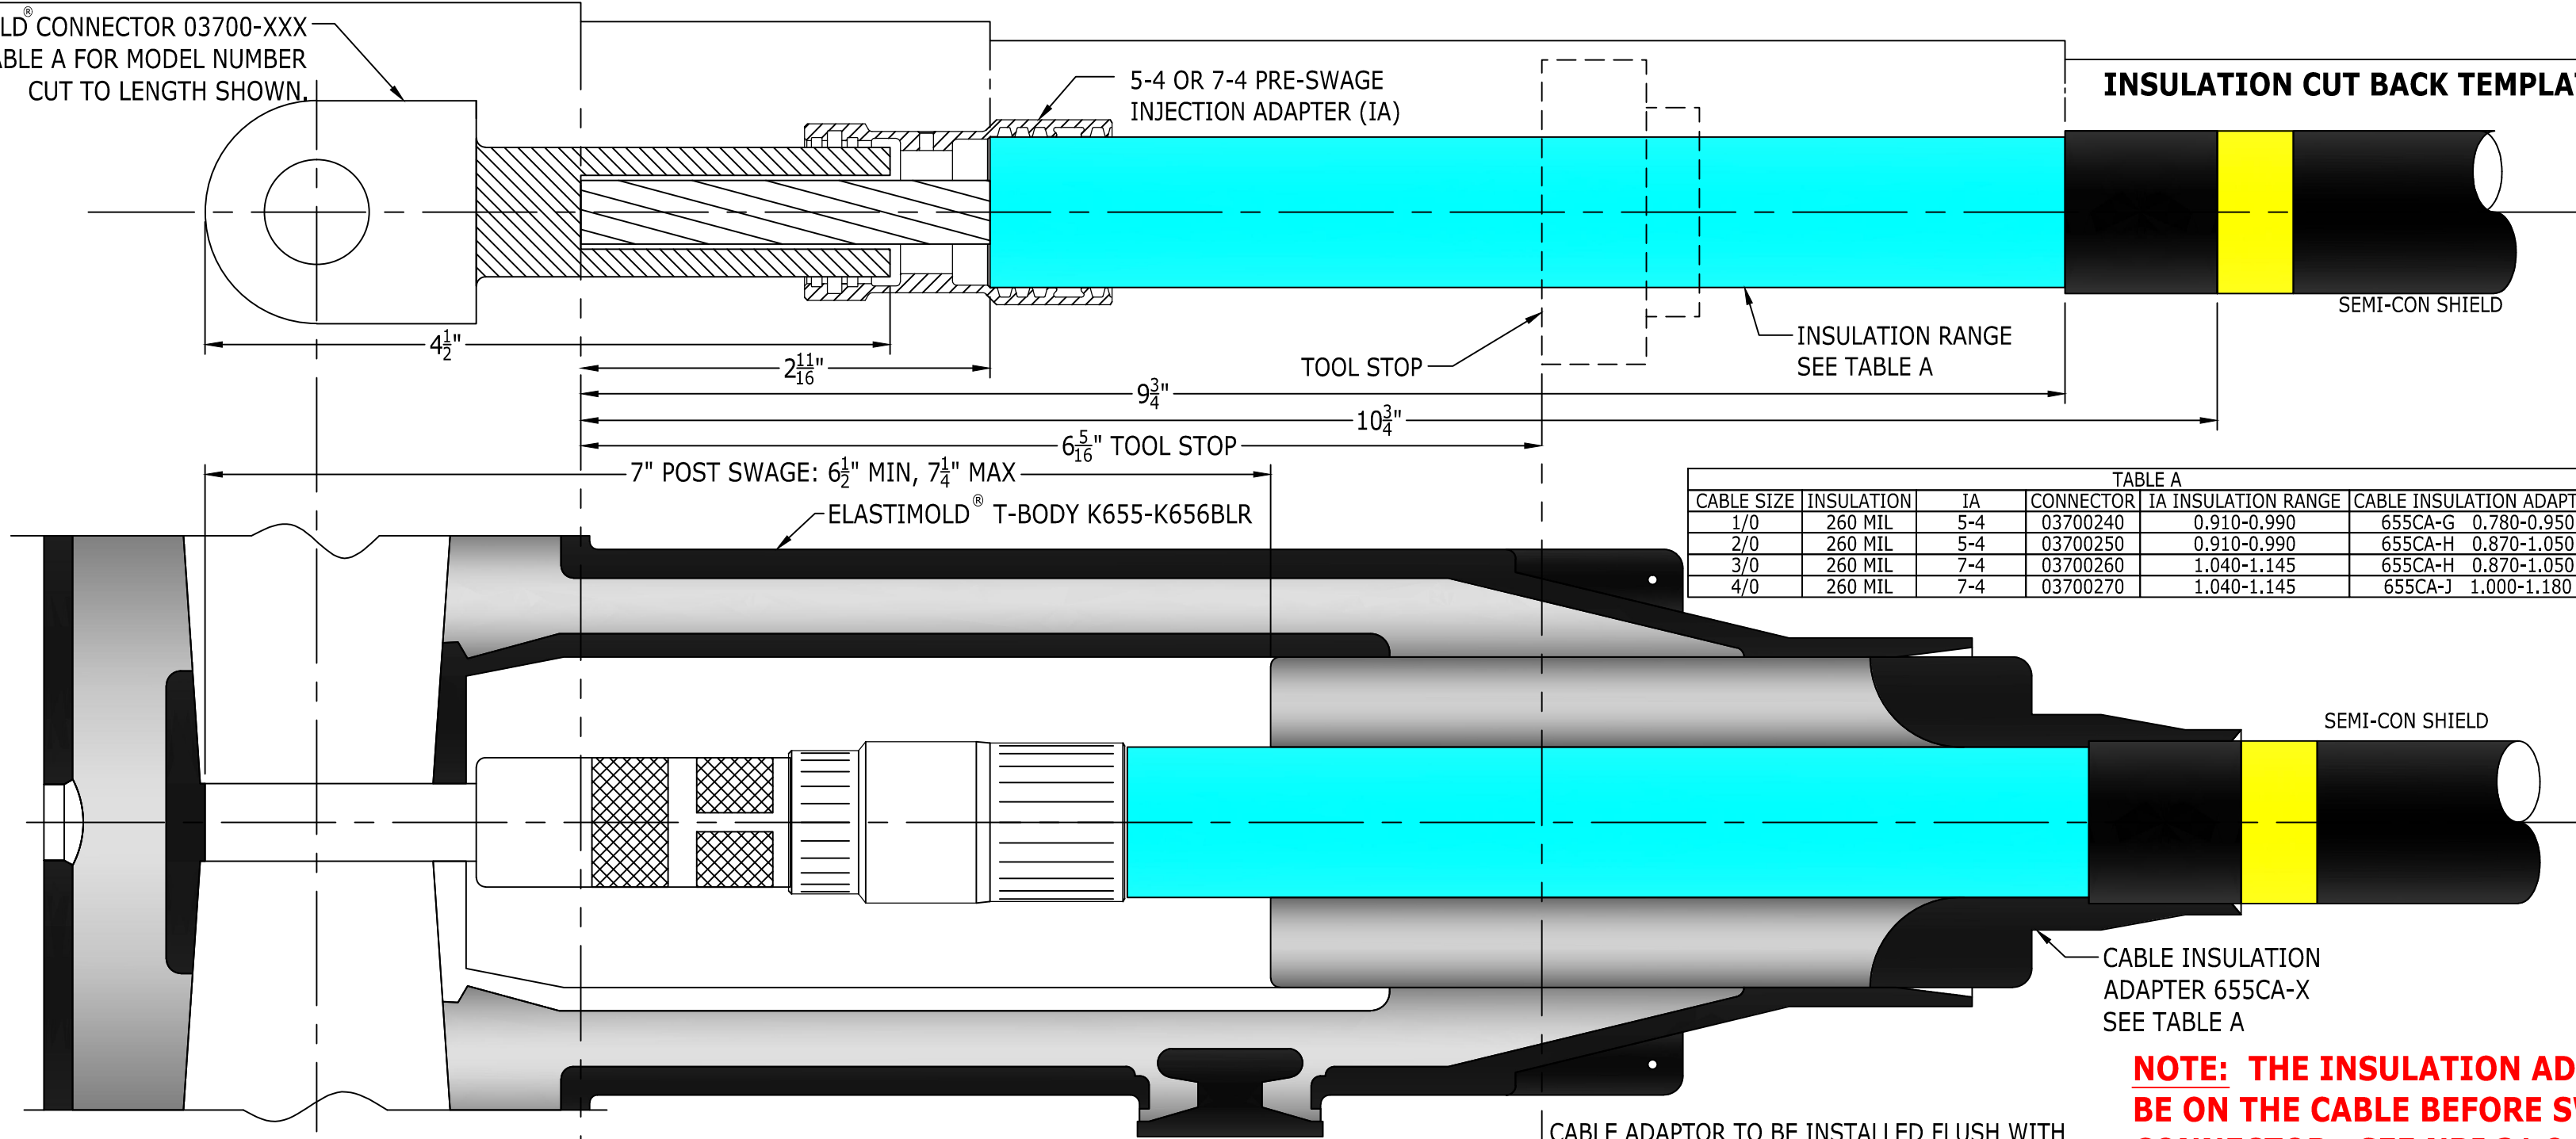

INSULATION CUT BACK TEMPLATE

SEMI-CON SHIELD

TOOL STOP

INSULATION RANGE
SEE TABLE A

7" POST SWAGE: 6 1/2" MIN, 7 1/4" MAX

ELASTIMOLD® T-BODY K655-K656BLR

TABLE A					
CABLE SIZE	INSULATION	IA	CONNECTOR	IA INSULATION RANGE	CABLE INSULATION ADAPTOR
1/0	260 MIL	5-4	03700240	0.910-0.990	655CA-G 0.780-0.950
2/0	260 MIL	5-4	03700250	0.910-0.990	655CA-H 0.870-1.050
3/0	260 MIL	7-4	03700260	1.040-1.145	655CA-H 0.870-1.050
4/0	260 MIL	7-4	03700270	1.040-1.145	655CA-J 1.000-1.180

CABLE INSULATION
ADAPTER 655CA-X
SEE TABLE A

SEMI-CON SHIELD

CABLE ADAPTOR TO BE INSTALLED FLUSH WITH
MARKING TAPE. LEAVE MARKING TAPE ON.

**NOTE: THE INSULATION ADAPTER MUST
BE ON THE CABLE BEFORE SWAGING THE
CONNECTOR. SEE NRI 31 & NRI 32**

TOOL STOP POSITION TEMPLATE

EMD-25 K655-656BLR 1to40 5to7-4 17sep13

© www.Novinium.com/patents.aspx
IA is protected by patents and patents pending

ELASTIMOLD is a registered trademark of Thomas & Betts Corp. novinium is a registered trademark of novinium.
(Printing instructions: For best results, print in color, protect w/5mil laminate and trim to size.)

novinium
masters of reliability

SCALE: 1:1

8.5 x 20 paper size